


# ROOFCOLOR HEXAGON



General description:  
coloured asphalt shingle with thermoadesive tabs

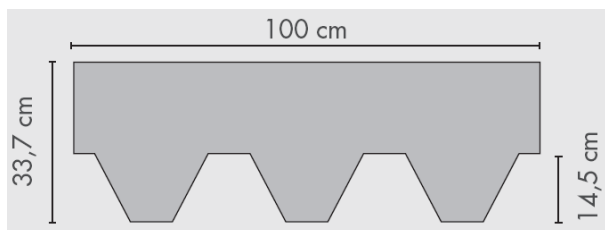

Notified Body 0497  
n°1525/07

bituminous compound	-		Blown bitumen	
length	EN 544	mm	1000	+/-3
width	EN 544	mm	337	+/-3
thickness	-	mm	3	+/-10%
exposed area	-	mm	143	-

## Physical-chemical properties

weight	-	kg/m <sup>2</sup>	8,3	+/-8%
mass of the fibreglass mat	-	g/m <sup>2</sup>	100	+/-10%
bitumen single layer	EN 544	g/m <sup>2</sup>	>1300	-
granules single layer	EN 544	g/m <sup>2</sup>	>1200	-
mechanical resistance MD/CMD	EN 544	N/5 cm	700/450	-
nail resistance	EN 544	N	100	-
granules adhesion	EN 544	-g	<1,5	-
Minimum adhesion temperatura for tabs		°C	60	

## Fire behaviour

classification according	EN 13501-5		B roof (t1)	
classification according	EN 13501-1		E	

## Wrapping

type			polyethylene	
shingles for bundle			16	
m <sup>2</sup> /bundle			2,30	
m <sup>2</sup> /pallet			183	

713i Rev.0 – 31/03/16